

**UEA Series****UEB Series****UEC Series****FEATURE:**

Constant Voltage Mode
Super Mini Size and Easy Portable
Light & Convenient Plug In
Wall Mount Type

APPLICATION:

Lithium Ion Battery Charger
Digital Camera
CD-ROM & HUB
Communication Terminals
MP3
Portable Device Or Machine

INPUT/OUTPUT SPECIFICATIONS:


Input Voltage: (UEA125D): AC100V-120V, (UEx325D, x = A, B & C): AC100V-240V,50/60Hz
Output Power: 25W
Output Voltage: See table below
Over Current Protection: 120% Min
Over Voltage Protection: 120% Min
Short Protection: Auto Recovery
Load Regulation: $\pm 5\%$

GENERAL SPECIFICATIONS:


Operating Temperature: 0 ~ 40°C
Operating Relative Humidity: 5 ~ 95%RH
Storage Temperature: -20 ~ 85°C
Withstanding Voltage: (UEA125D): AC 2000V/Min (between Input & Output),10mA Max.
(UEx325D, x = A, B & C): AC 3000V/Min (between Input & Output),10mA Max
Insulation Resistance: DC500V 100M Ω (Min.) (between Input & Output)
Efficiency: 70% Min

Model Series	UEA125D	UEA325D		UEB325D	UEC325D
AC Input Rating	90V~132V	90V~264V			
DC Output Rating		A 5V / 1.5A 12V / 1.5A	B 5V / 1.5A 12V / 1.0A	C 5V / 2.0A 12V / 1.5A	D 5V / 2.0A 12V / 1.0A
Safety		<p>Only 5V/1.5A , 12V/1.5A</p>			

UEA Series

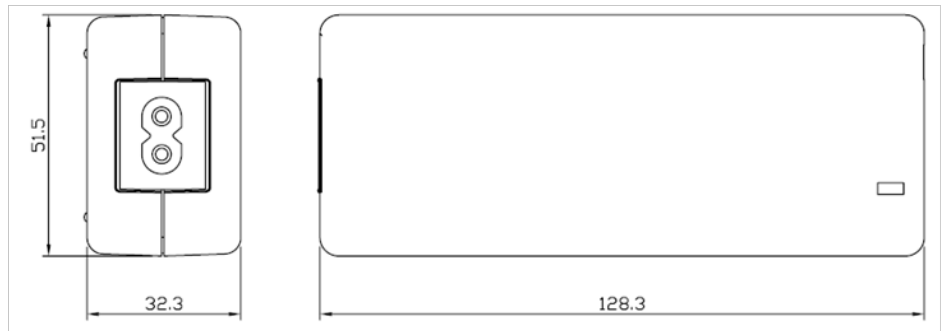

UEB Series

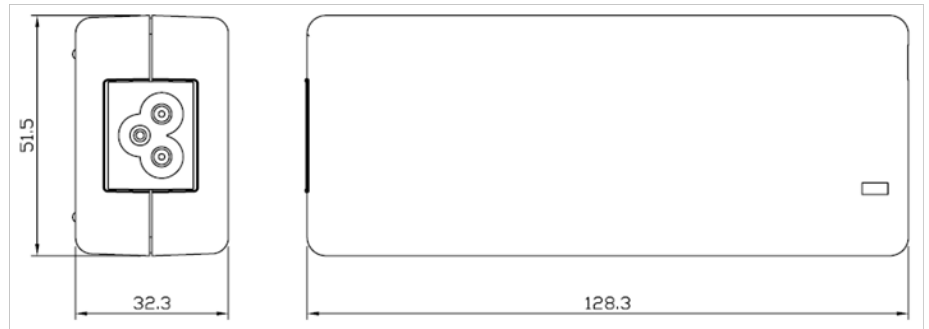

UEC Series

