

# Open Frame Switching Power Supply 36W Series

## UOP Series

### Product Highlights:

- ✓ Stability
- ✓ Ultra small size
- ✓ Energy efficiency

### Protection:

- ✓ Short circuit protection
- ✓ Over Voltage Protection
- ✓ Over Current Protection

### Efficiency:

- ✓ CEC Leve 5
- ✓ Energy Star 2.0



### Emissions:

- ✓ CE CISPR 22 Class B
- ✓ VCCI Class B

### Immunity:

- ✓ EN55024/A1:2001
- ✓ Electrostatic discharge: 61000-4-2
- ✓ Radiated electromagnetic fields:61000-4-3
- ✓ Fast transients (Burst): 61000-4-4
- ✓ Surge transients: 61000-4-5
- ✓ Conducted disturbance: 61000-4-6
- ✓ Voltage dips, interruptions & Variations:61000-4-11

### Electrical Spec:

Absolute Maximum Rating

Input					
Description	Min	Typ	Max	Units	Comment
Voltage	90	120/240	264	VAC	2 Wire No Protection Ground
Frequency	47	50/60	63	Hz	

Environmental					
Description	Min	Typ	Max	Units	Comment
Operating Temperature	0	-	40	°C	Free Convection,Sea level
Non-Operating Temperture	-20	-	85	°C	Free Convection,Sea level
Operating Humidity	10	-	90	%RH	No Condensing
Non-Operating Humidity	10	-	90	%RH	No Condensing

Typical model list:


## Open Frame Switching Power Supply 36W Series

Input Condition	DC Output Voltage	DC Output Current	Output Voltage Precision	Ripple & Noises	Regulation		Option/Remark
					Line	Load	
1	12V	3.0A	±5%	120mV	±1%	±5%	
2	15V	2.4A	±5%	150mV	±1%	±5%	
3	16V	2.2A	±5%	150mV	±1%	±5%	
4	18V	2.0A	±5%	180mV	±1%	±5%	
5	24V	1.5A	±5%	240mV	±1%	±5%	
6	35V	1.0A	±5%	300mV	±1%	±5%	
7	-	-	-	-	-	-	-

Measurement condition

1. Measurements shall be made with an oscilloscope with 20MHz bandwidth.
2. Outputs shall be bypassed at the connector with a 0.1uF ceramic disk capacitor and a 10uF electrolytic capacitor to simulate system loading.

Mechanical Spec:

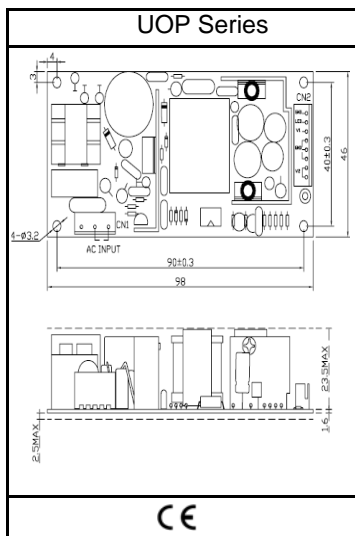

Packing Spec:

Type	Pcsper Carton	Gross Weight (kg)	Net Weight(kg)	Size(mm)	CBM(m <sup>2</sup> )	Container	Ctn/Container	Pcs/Container	Gross Weight (Ton)	Remark
UOP336	120	14.7	13.2	406×250×298	1×1.2	20	800	96000	12000	Bulk package

## UOA Series



### Product Highlights:

- ✓ Stability
- ✓ Ultra small size
- ✓ Energy efficiency

### Protection:

- ✓ Short circuit protection
- ✓ Over Voltage Protection
- ✓ Over Current Protection

### Efficiency:

- ✓ CEC Leve 5
- ✓ Energy Star 2.0

### Emissions:

- ✓ CE CISPR 22 Class B
- ✓ VCCI Class B

### Immunity:

- ✓ EN55024/A1:2001
- ✓ Electrostatic discharge: 61000-4-2
- ✓ Radiated electromagnetic fields:61000-4-3
- ✓ Fast transients (Burst): 61000-4-4
- ✓ Surge transients: 61000-4-5
- ✓ Conducted disturbance: 61000-4-6
- ✓ Voltage dips, interruptions & Variations:61000-4-11

### Electrical Spec:

Absolute Maximum Rating

Input					
Description	Min	Typ	Max	Units	Comment
Voltage	90	120/240	264	VAC	2 Wire No Protection Ground
Frequency	47	50/60	63	Hz	

Environmental					
Description	Min	Typ	Max	Units	Comment
Operating Temperature	0	-	40	°C	Free Convection,Sea level
Non-Operating Temperture	-20	-	85	°C	Free Convection,Sea level
Operating Humidity	10	-	90	%RH	No Condensing
Non-Operating Humidity	10	-	90	%RH	No Condensing

Typical model list:


## Open Frame Switching Power Supply 36W Series

Input Condition	DC Output Voltage	DC Output Current	Output Voltage Precision	Ripple & Noises	Regulation		Option/Remark
					Line	Load	
1	12V	3.0A	±5%	120mV	±1%	±5%	
2	15V	2.4A	±5%	150mV	±1%	±5%	
3	16V	2.2A	±5%	150mV	±1%	±5%	
4	18V	2.0A	±5%	180mV	±1%	±5%	
5	24V	1.5A	±5%	240mV	±1%	±5%	
6	35V	1.0A	±5%	300mV	±1%	±5%	
7	-	-	-	-	-	-	-

Measurement condition

1. Measurements shall be made with an oscilloscope with 20MHz bandwidth.
2. Outputs shall be bypassed at the connector with a 0.1uF ceramic disk capacitor and a 10uF electrolytic capacitor to simulate system loading

Mechanical Spec:

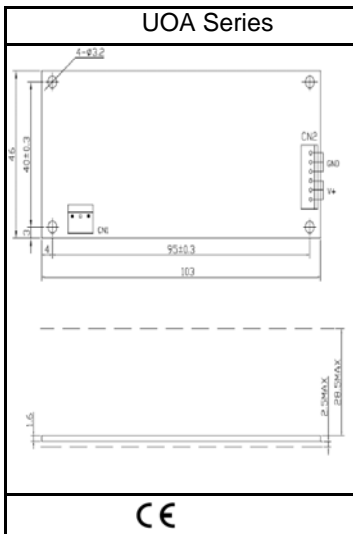

Packing Spec:

Type	Pcsper Carton	Gross Weight (kg)	Net Weight(kg)	Size(mm)	CBM(m2)	Container	Ctn/Container	Pcs/Container	Gross Weingt (Ton)	Remark
UOA336	120	17.4	14.4	565x393x255	1x1.2	20	400	48000	7200	Bulk package

## UOC Series



### Product Highlights:

- ✓ Stability
- ✓ Ultra small size
- ✓ Energy efficiency

### Protection:

- ✓ Short circuit protection
- ✓ Over Voltage Protection
- ✓ Over Current Protection

### Efficiency:

- ✓ CEC Leve 5
- ✓ Energy Star 2.0

### Emissions:

- ✓ CE CISPR 22 Class B
- ✓ VCCI Class B

### Immunity:

- ✓ EN55024/A1:2001
- ✓ Electrostatic discharge: 61000-4-2
- ✓ Radiated electromagnetic fields:61000-4-3
- ✓ Fast transients (Burst): 61000-4-4
- ✓ Surge transients: 61000-4-5
- ✓ Conducted disturbance: 61000-4-6
- ✓ Voltage dips, interruptions & Variations:61000-4-11

### Electrical Spec:

Absolute Maximum Rating

Input					
Description	Min	Typ	Max	Units	Comment
Voltage	90	120/240	264	VAC	2 Wire No Protection Ground
Frequency	47	50/60	63	Hz	

Environmental					
Description	Min	Typ	Max	Units	Comment
Operating Temperature	0	-	40	°C	Free Convection,Sea level
Non-Operating Temperture	-20	-	85	°C	Free Convection,Sea level
Operating Humidity	10	-	90	%RH	No Condensing
Non-Operating Humidity	10	-	90	%RH	No Condensing

Typical model list:


## Open Frame Switching Power Supply 36W Series

Input Condition	DC Output Voltage	DC Output Current	Output Voltage Precision	Ripple & Noises	Regulation		Option/Remark
					Line	Load	
1	12V	3.0A	±5%	120mV	±1%	±5%	
2	15V	2.4A	±5%	150mV	±1%	±5%	
3	16V	2.2A	±5%	150mV	±1%	±5%	
4	18V	2.0A	±5%	180mV	±1%	±5%	
5	24V	1.5A	±5%	240mV	±1%	±5%	
6	35V	1.0A	±5%	300mV	±1%	±5%	
7	-	-	-	-	-	-	-

Measurement condition

1. Measurements shall be made with an oscilloscope with 20MHz bandwidth.
2. Outputs shall be bypassed at the connector with a 0.1uF ceramic disk capacitor and a 10uF electrolytic capacitor to simulate system loading.

Mechanical Spec:

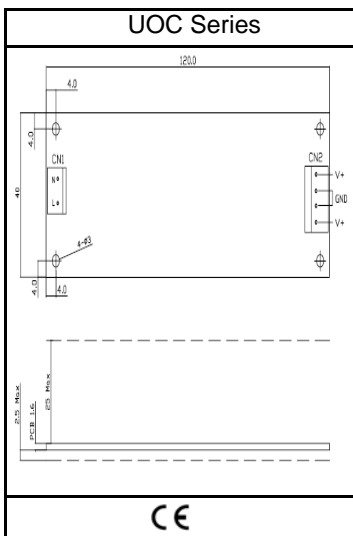

Packing Spec:

Type	Pcsper Carton	Gross Weight (kg)	Net Weihgt(kg)	Size(mm)	CBM(m2)	Container	Ctn/Contai ner	Pcs/Contai ner	Gross Weingt (Ton)	Remark
UOC336	128	15.8	12.8	565x393x255	1x1.2	20	400	51200	6560	Bulk package